

Paplin's

Quilling Fringer Tool

No. 3189


45 DEGREE ANGLE CUT FOR FRINGING LEAVES

ADJUST DEPTH & WIDTH OF FRINGE

FOR 1/4 INCH TO 3/4 INCH FOLDED PAPER STRIPS*

*measurement before folding

1. To adjust the width of the fringe, slightly loosen screw behind cam. With cam in desired position, hold cam in place and then tighten screw. Please note only minor adjustments need to be made to vary the width of fringe.
2. Adjust depth of fringe using the Allen wrench provided. Again, only slight adjustments need be made as the screw becomes more visible under the arm, and the depth of your fringe will become shorter.

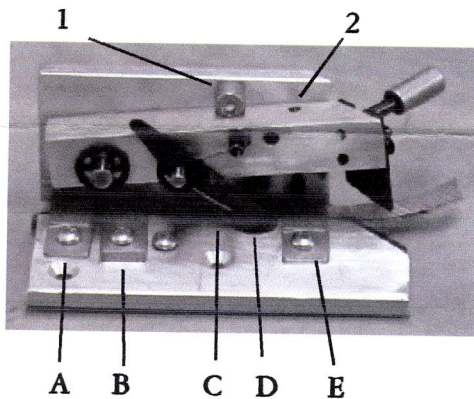

Insert paper under guide A, then under the spring C. Continue under advance fringer D, and finally under the last guide E. Guide B can be adjusted with screwdriver to the width of the quilling paper.

Please Read All Instructions Before Using

Each fringer is tested before shipping. There is quilling paper in the fringer, so take a look at how the tool is threaded, and how paper must go under both guides, the wire, and the feed arm. Here are some tips on fringer use. **DO NOT** attempt to move handle up and down without paper as it may damage your fringer. Always keep paper in fringer.

When feeding paper under guides use tweezers to slide paper under wire, feed arm, and second guide. If paper gets bunched up from trying to push through guides, it will not feed properly.

Once paper is threaded through guides, be sure wire is resting on paper and not off to the side.

TO MAKE LEAVES

1. Fold strip in half lengthwise making sure strip is flat. TIP: Use a craft knife to score your paper in half lengthwise.
2. Insert folded strip under guides with fold against back of fringer.
3. To fringe: move lever up and down, paper will feed automatically as it is fringed.



Made in the USA

Paplin Products, LLC

Strongsville, Ohio 44149